

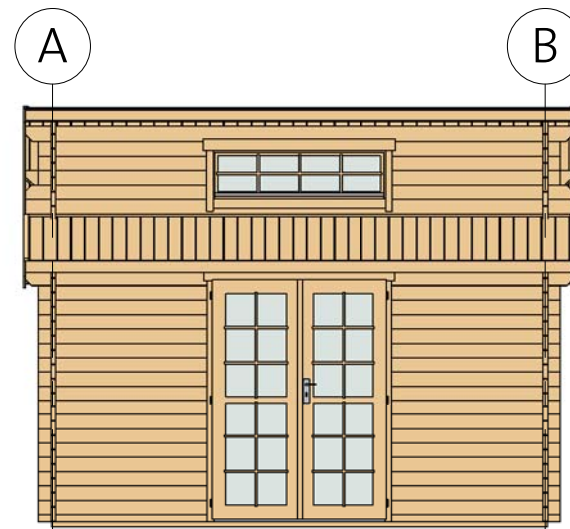


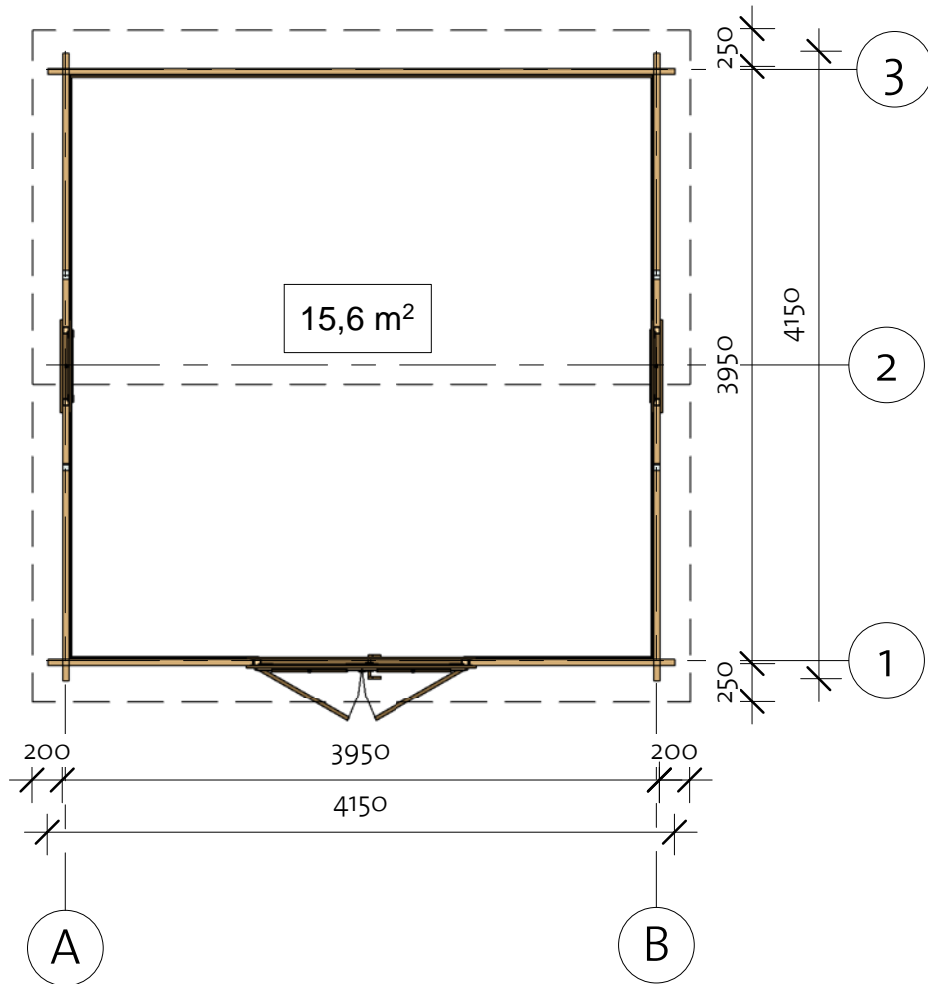

Mykonos 40 (395x395)

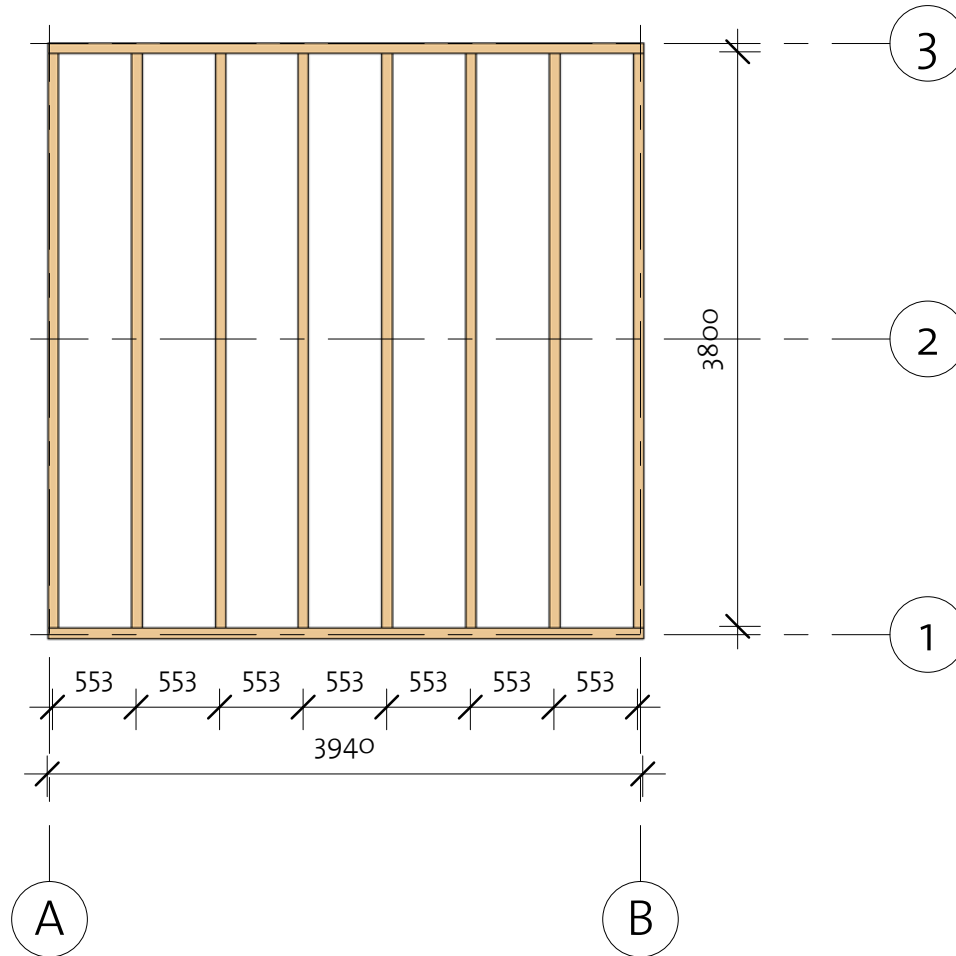

Mykonos 40 (395x395)

Foundation





Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	3940
IFB2	IFB 70x40		8	3800

Mykonos 40 (395x395)

Floor Plan

① Baseboard

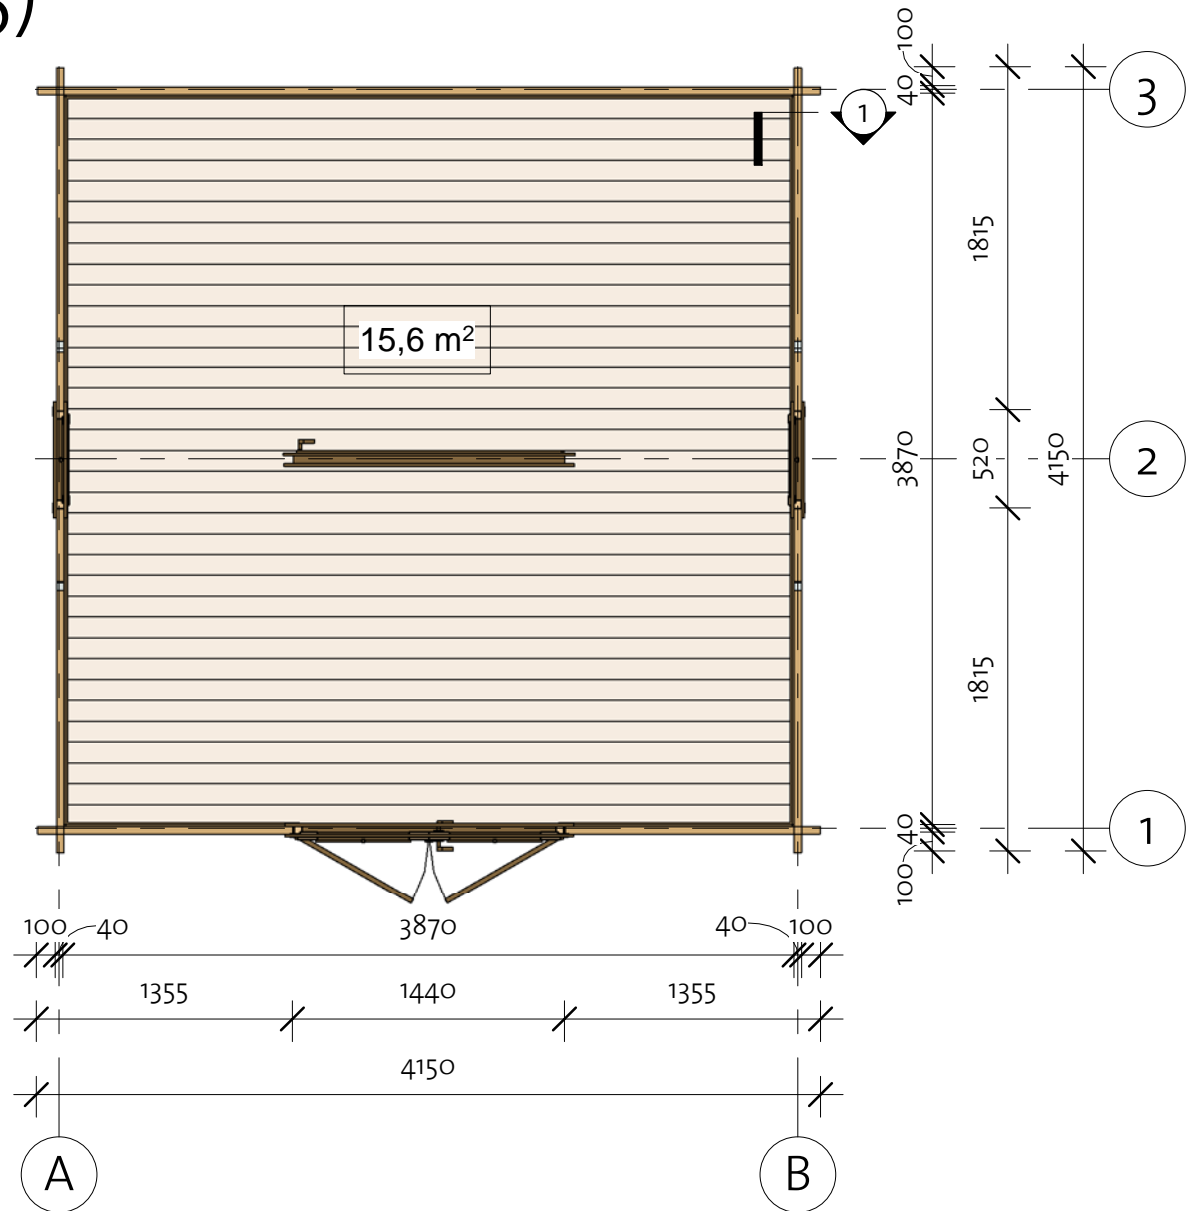


Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 18x110		36	3864
BB	BB 20x40		4	3950

Mykonos 40 (395x395)

Wall 1

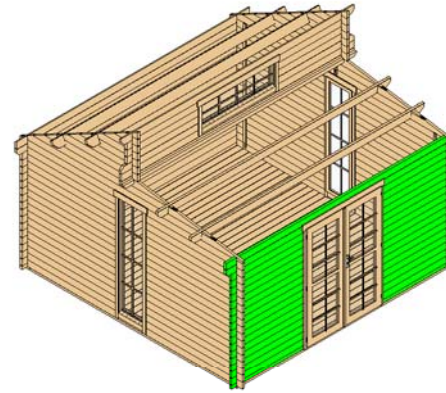


Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	2	1355
1LG-1	40X114	32	1355
1LG-2	40X114	2	1455
1TL-1	40X114	1	4350


Log Profile Wall 1	
Profile	Profile

40X57	
40X114	
40X114	

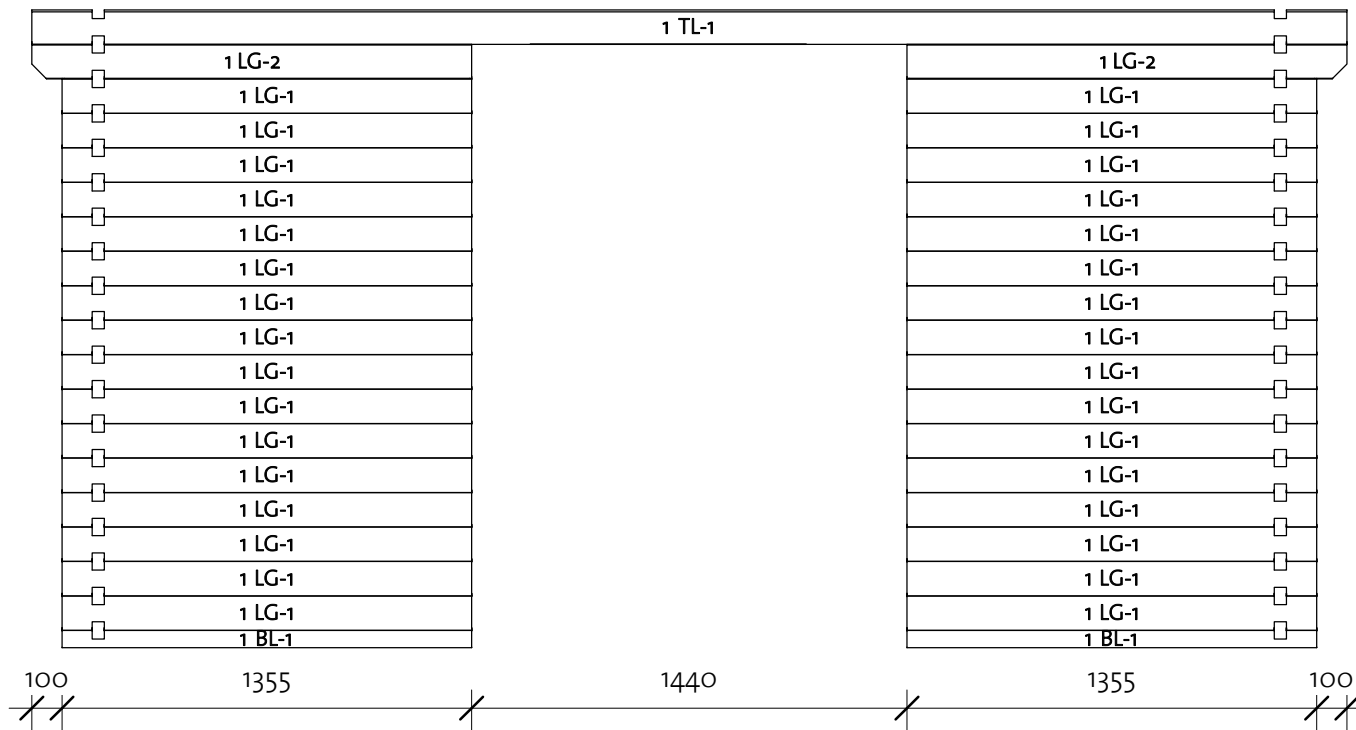


Mykonos 40 (395x395)

Wall 2

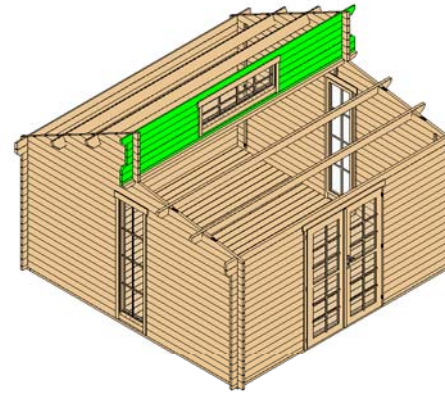

Wall 2			
Mark	Profile	Count	Cut Length

2LG-2	40X114	1	1453
2LG-1	40X114	6	1353
2LG-2	40X114	1	1453
2LG-3	40X114	1	4350
2LG-4	40X114	1	4350
2TL-1	40X123	1	4350

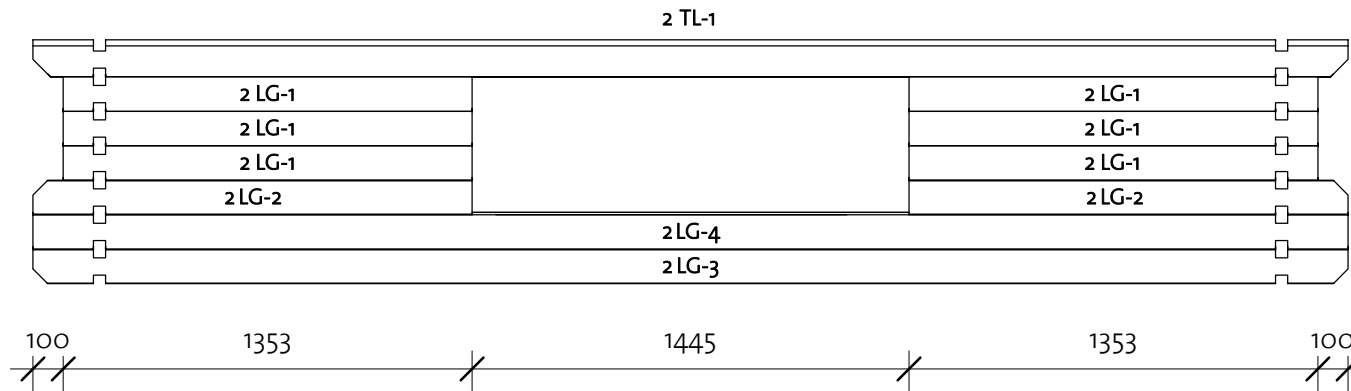


Log Profile Wall 2	
Profile	Profile

40X114	
40X123	


Mykonos 40 (395x395)

Wall 3

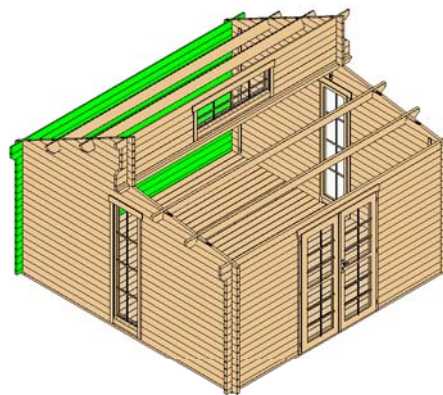

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40x57	1	4150
3LG-1	40x114	16	4150
3LG-2	40x114	1	4350
3TL-1	40x123	1	4350

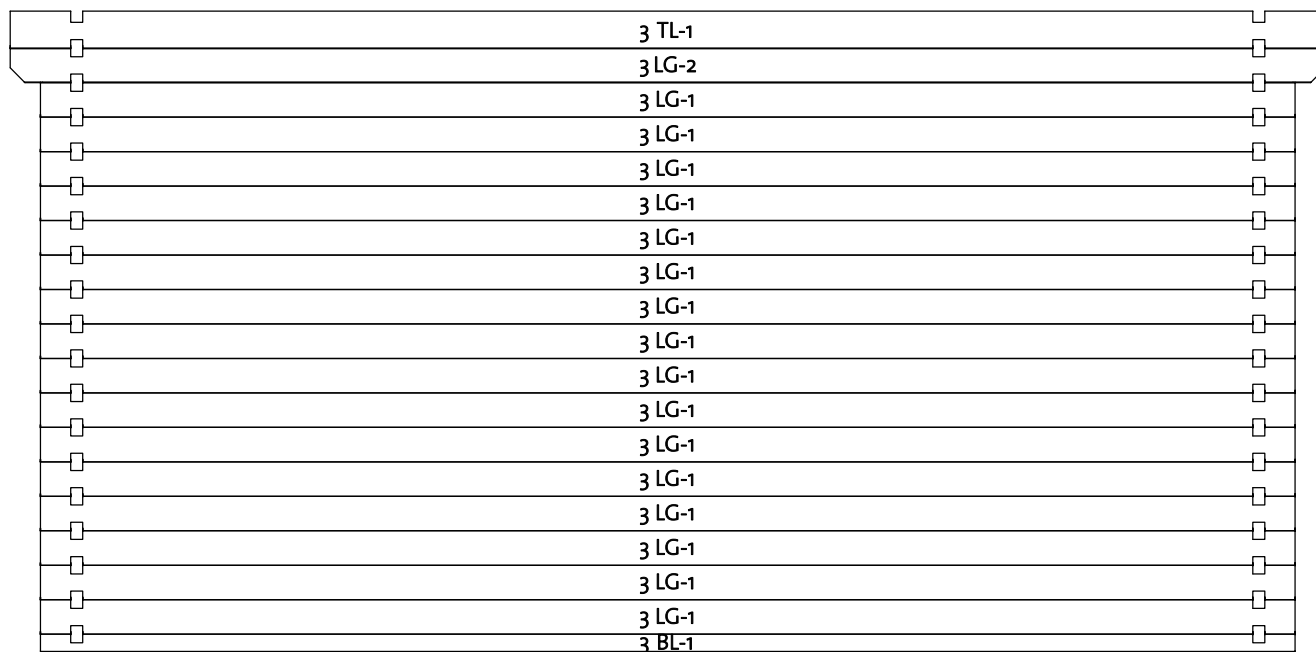




100
//

4150


100
//

Log Profile Wall 3	
Profile	Profile

40x57	
40x114	
40x123	

Mykonos 40 (395x395)

Wall A

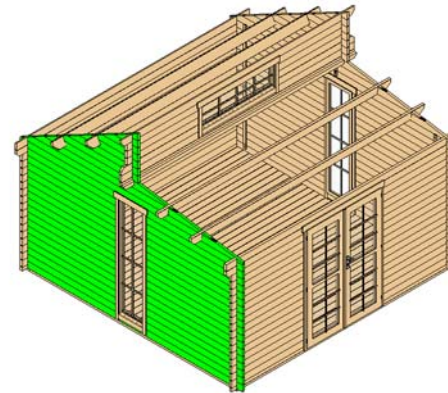


Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40x114	1	225
ALG-2	40x114	1	443
ALG-3	40x114	1	660
ALG-4	40x114	1	878
ALG-5	40x114	1	1095
ALG-6	40x114	1	1312
ALG-7	40x114	33	1815
ALG-8	40x114	1	1815
ALG-9 *	40x114	1	2472
ALG-10 *	40x114	1	3415
ALG-11 *	40x114	1	4136
ALG-12	40x114	1	4150
ALG-13	40x114	1	1529


* Gable - delivered premounted

Log Profile Wall A	
Profile	Profile

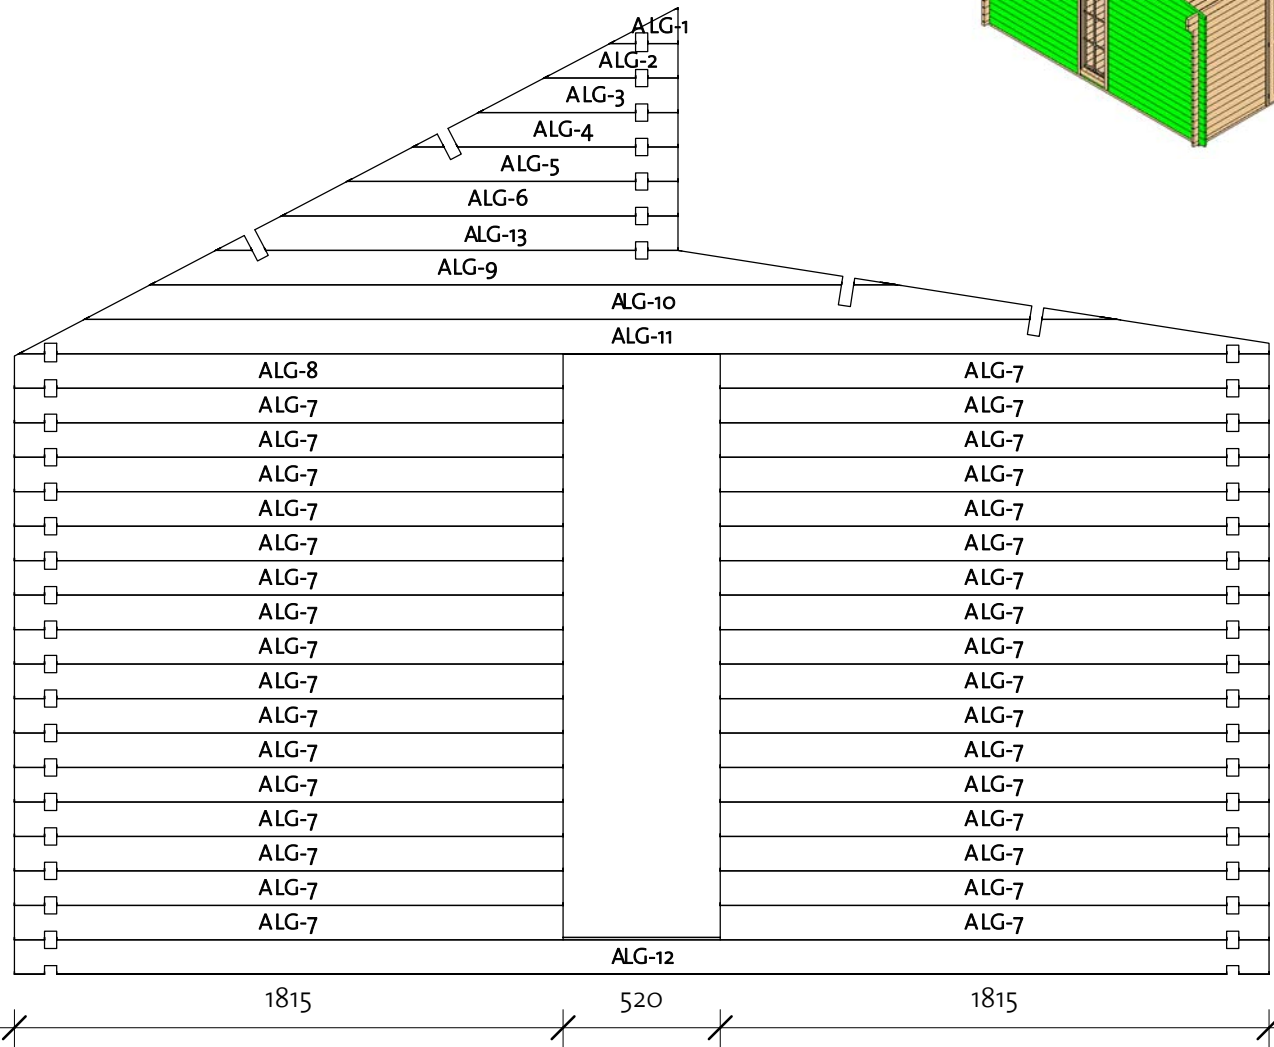

Mykonos 40 (395x395)

Wall B

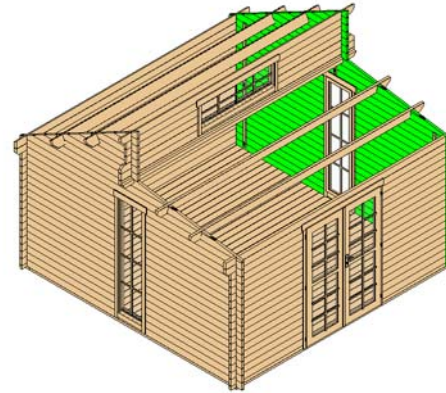


Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40x114	1	225
BLG-2	40x114	1	443
BLG-3	40x114	1	660
BLG-4	40x114	1	878
BLG-5	40x114	1	1095
BLG-6	40x114	1	1312
BLG-7	40x114	33	1815
BLG-8	40x114	1	1815
BLG-9 *	40x114	1	2472
BLG-10 *	40x114	1	3415
BLG-11 *	40x114	1	4136
BLG-12	40x114	1	4150
BLG-13	40x114	1	1529


* Gable - delivered premounted

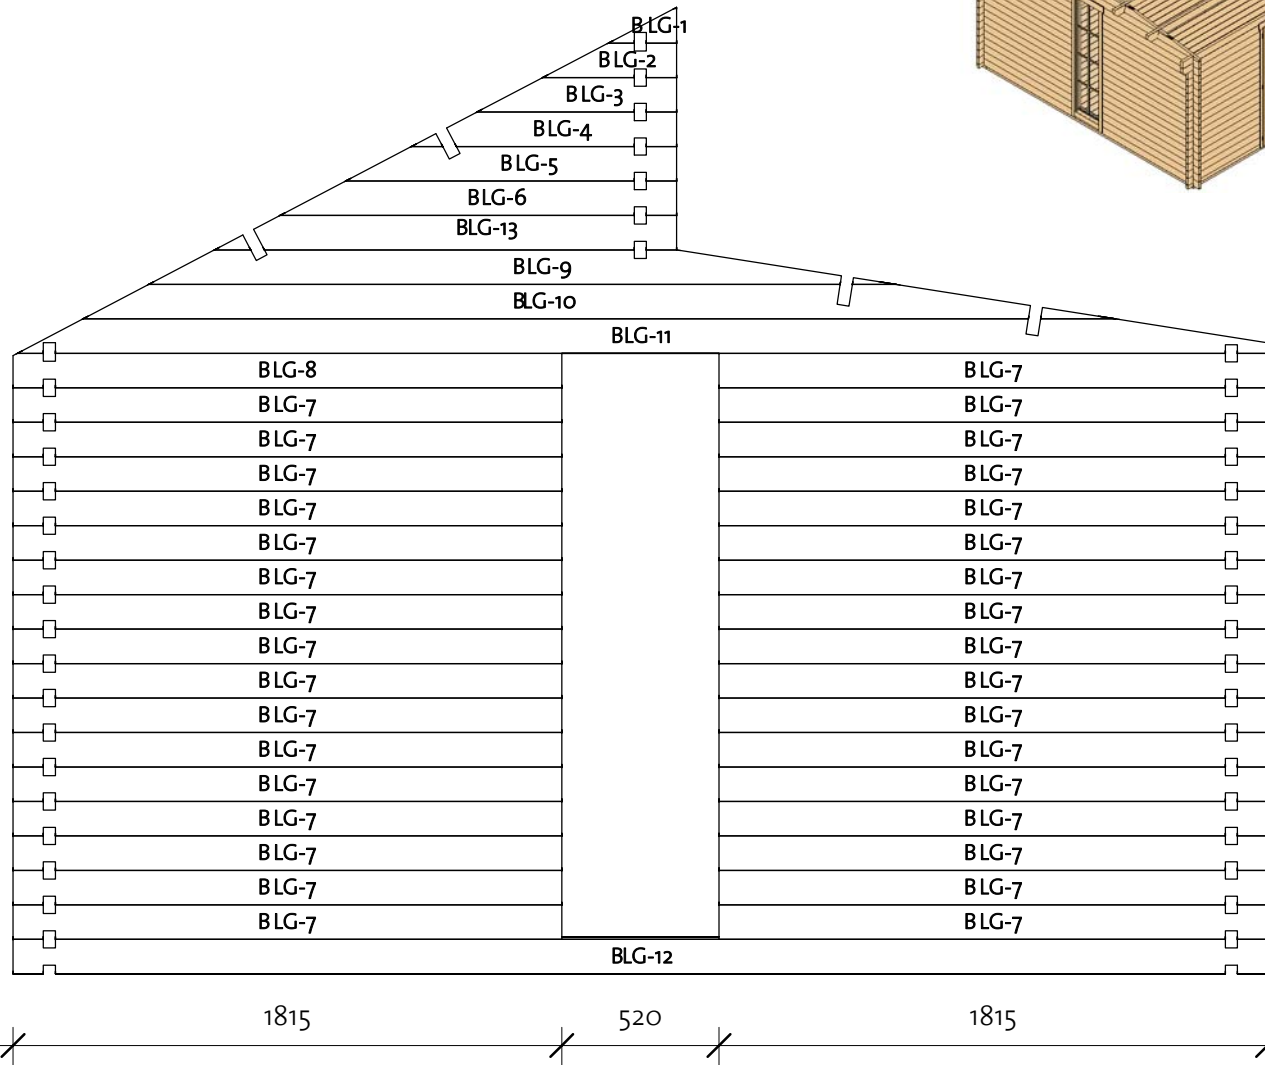


Log Profile Wall B	
Profile	Profile




Mykonos 40 (395x395)

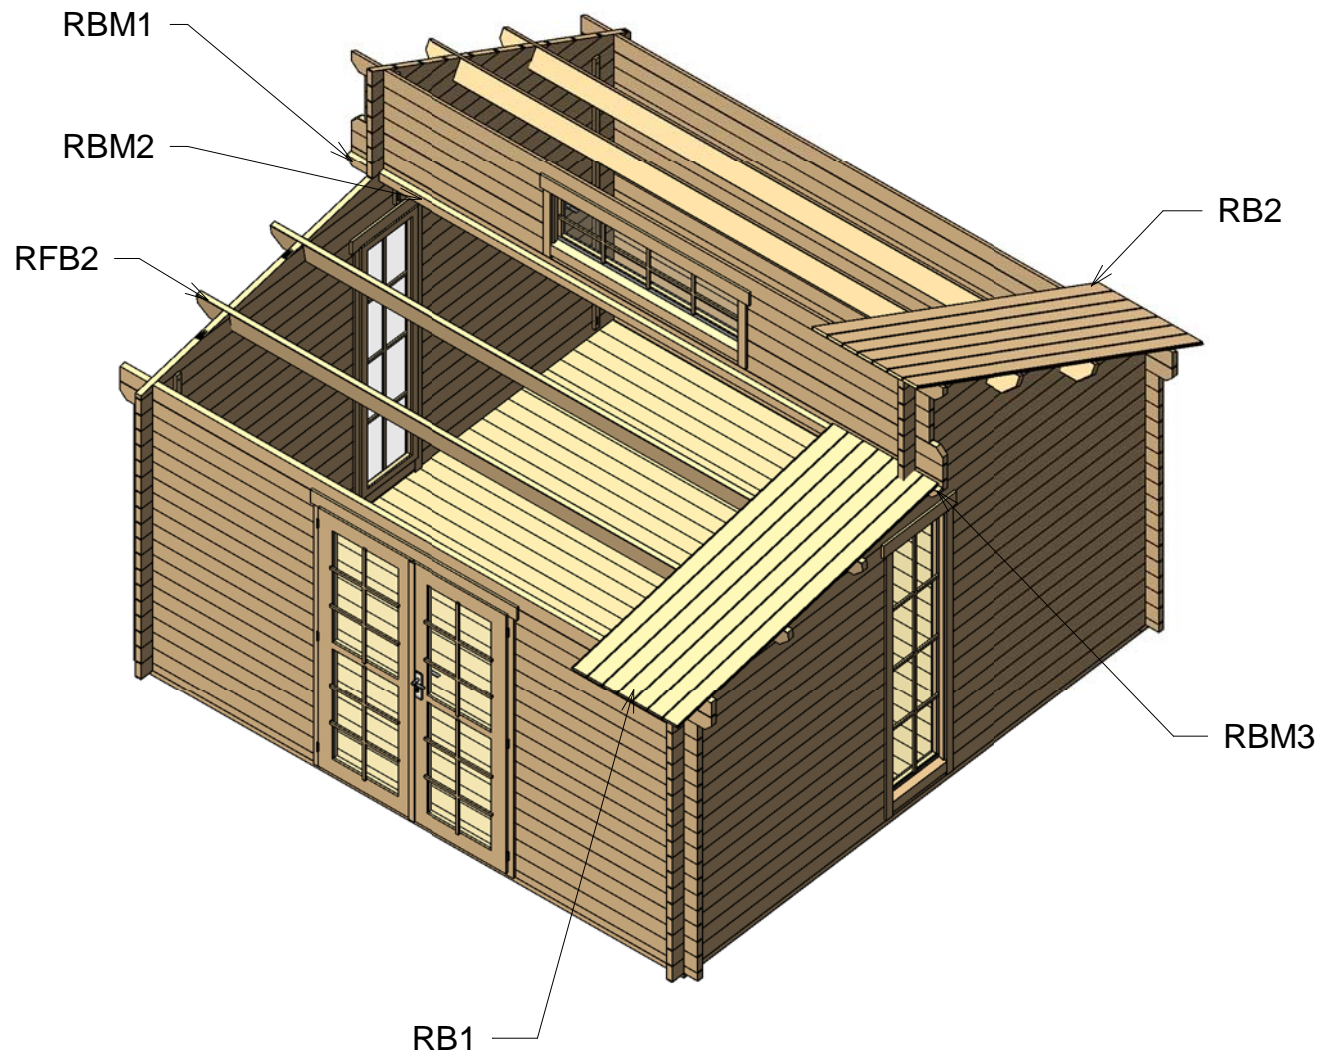Roof 1





Roof				
Mark	Type	Profile	Count	Length
RB1	18x110		41	2232
RB2	18x110		41	2748
RBM1	Beam 40x70		1	200
RBM2	Beam 40x70		1	3870
RBM3	Beam 40x70		1	200
RFB	Beam 40x143		4	4350


Mykonos 40 (395x395)

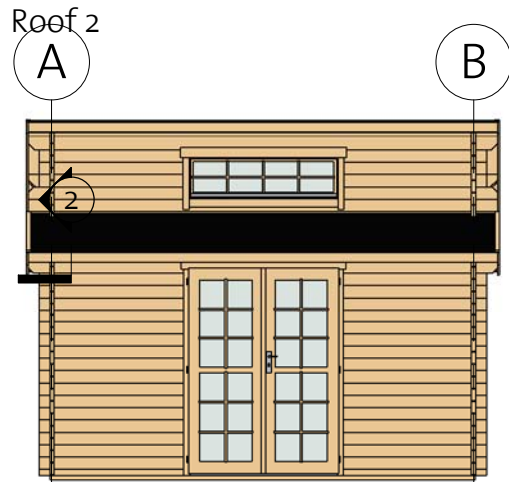

② Facia

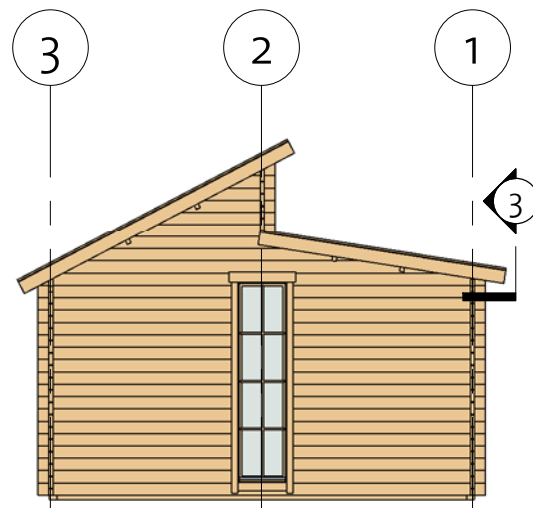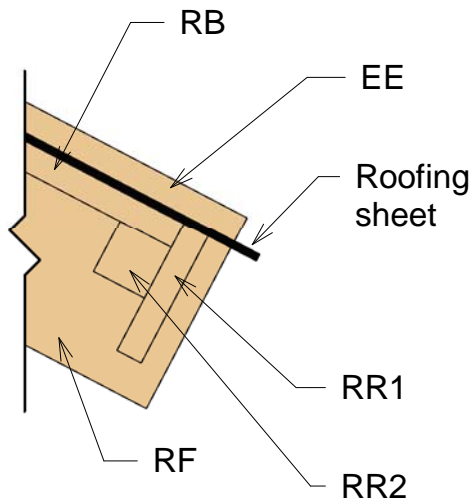


③ Roof Reinforcement

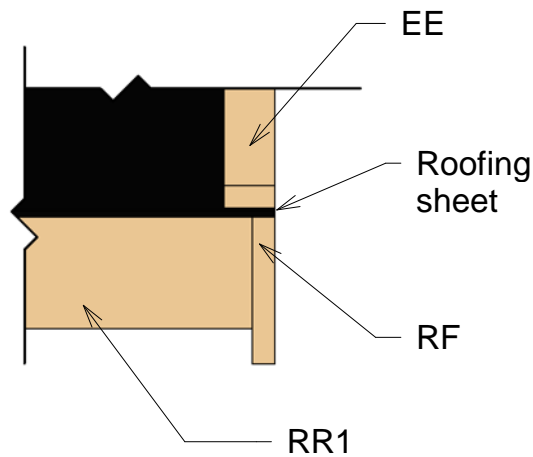

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x40		2	2270
EE2	Eave Edging 18x40		2	2820
RF1	Roof Fascia 18x120		2	2312
RF2	Roof Fascia 18x120		2	2820
RR1	Roof reinforcement 18x95		3	4350
RR2	Roof reinforcement 38x38		3	4350

Mykonos 40 (395x395)

Extras

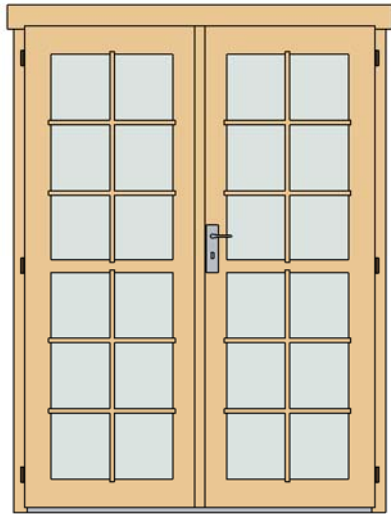

Door Schedule				
Model	Type	Width	Height	Count



CDD17R	Classic double door 17, two glass right	1425	1955	1
--------	---	------	------	---

DCB6	Door Crossbar 6	--	--	4
------	-----------------	----	----	---

Window Schedule				
Mark	Type	Width	Height	Count

CW20R	Classic window 20 right	1435	420	1
CW21R	Classic window 21 right	515	1890	2

WCB8-5	Windows Crossbar 8-5	--	--	1
WCB8-6	Windows Crossbar 8-6	--	--	2

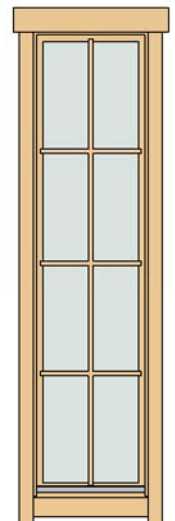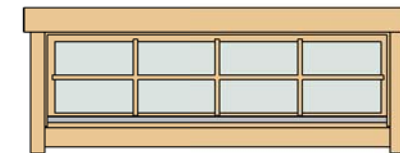

Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Bolts	M8x70	16
Screws	5,0 x 70	35
Nails	1,4 x 40	40
Screws	6,0 x 140	70
Screws	4,0 x 40	130
Screws	4,0 x 50	660





Type	Count	Length
------	-------	--------


Windboard 1 18x40	4	2200
Windboard 2 18x40	2	960

Mykonos 40 (395x395)




List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	3940
IFB2	IFB 70x40		8	3800


BB	BB 20x40		4	3950
----	-------------	--	---	------

Roof







Mark	Type	Profile	Count	Length
RB1	18x110		41	2232
RB2	18x110		41	2748
RBM1	Beam 40x70		1	200
RBM2	Beam 40x70		1	3870
RBM3	Beam 40x70		1	200
RFB	Beam 40x143		4	4350

190527

Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 18x110		36	3864

Fascia Schedule

Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x40		2	2270
EE2	Eave Edging 18x40		2	2820
RF1	Roof Fascia 18x120		2	2312
RF2	Roof Fascia 18x120		2	2820
RR1	Roof reinforcement 18x95		3	4350
RR2	Roof reinforcement 38x38		3	4350

Mykonos 40 (395x395)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	2	1355
1LG-1	40X114	32	1355
1LG-2	40X114	2	1455
1TL-1	40X114	1	4350

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40X57	1	4150
3LG-1	40X114	16	4150
3LG-2	40X114	1	4350
3TL-1	40X123	1	4350

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	1	225
BLG-2	40X114	1	443
BLG-3	40X114	1	660
BLG-4	40X114	1	878
BLG-5	40X114	1	1095
BLG-6	40X114	1	1312
BLG-7	40X114	33	1815
BLG-8	40X114	1	1815
BLG-9 *	40X114	1	2472
BLG-10 *	40X114	1	3415
BLG-11 *	40X114	1	4136
BLG-12	40X114	1	4150
BLG-13	40X114	1	1529

Wall 2			
Mark	Profile	Count	Cut Length

2LG-2	40X114	1	1453
2LG-1	40X114	6	1353
2LG-2	40X114	1	1453
2LG-3	40X114	1	4350
2LG-4	40X114	1	4350
2TL-1	40X123	1	4350

Wall A			
Mark	Profile	Count	Cut Length




ALG-1	40X114	1	225
ALG-2	40X114	1	443
ALG-3	40X114	1	660
ALG-4	40X114	1	878
ALG-5	40X114	1	1095
ALG-6	40X114	1	1312
ALG-7	40X114	33	1815
ALG-8	40X114	1	1815
ALG-9 *	40X114	1	2472
ALG-10 *	40X114	1	3415
ALG-11 *	40X114	1	4136
ALG-12	40X114	1	4150
ALG-13	40X114	1	1529

* Gable - delivered premounted

Mykonos 40 (395x395)

List of all items 3

Log profiles	
Profile	Profile

40x57	
40x123	
40x114	
40x114	